

HYDRAULIC CRIMPING TOOL




STRONG
CORE



PRESSURE RELIEF
VALVE SWITCH

PART NO.	OUT PUT TONNE	mm ²		AWG	
DW-70	7T	4	70	12	2/0
DW-300	12T	16	300	6	590 MCM
DW-400	16T	16	400	6	750 MCM
DW-630	25T	150	630	300 MCM	1250 MCM

HYDRAULIC CABLE CUTTER



STRONG
CORE



INSULATED
HANDLE



ARMORED FIBER
OPTIC CABLE (AOC)



COPPER ALUMINUM
CABLE (CAC)

PART NO.	OUT PUT TONNE	SHEAR RANGE
DW-50	6T	CAC : Ø 50 mm, AOC : Ø 40 mm
DW-75	8T	CAC : Ø 75 mm, AOC : Ø 55mm
DW95	10T	CAC : Ø 85 mm, AOC : Ø 65mm
DW-100A	12T	CAC : Ø 95 mm, AOC : Ø 85mm
DW-132A	13T	CAC : Ø125 mm AOC : Ø 120mm


HYDRAULIC HAND PUMP



AIR RELEASE
NUT



PRESSURE
RELIEF VALVE




ZG3/8-FEMALE

PART NO.	WORKING PRESSURE	TONNAGE CAPACITY
DW-700	20bar-700bar	10T


HYDRAULIC FOOT PUMP



AIR RELEASE NUT



PRECISION PUMP PISTON



ZG3/8-FEMALE

PART NO	: DW-800
STANDARD TUBING	: 17 MM
HIGH PRESSURE	: 800 BAR
LOW PRESSURE	: 20 BAR
HIGH PRESSURE OIL QUANTITY	: 2.3 CM ³
LOW PRESSURE OIL QUANTITY	: 13 CM ³
STORAGE CAPACITY	: 800 CC
NET WEIGHT / GROSS WEIGHT	: 10kg / 13kg

HYDRAULIC ELECTRIC PUMP



PART NO	: DW-750
CHARGER COMPATIBILITY	: 2220V / 50Hz
OUTPUT RATING	: 750 W
PHASE	: SINGLE
RATED OUTPUT	: 0.9L / min
OIL CAPACITY	: 7L
HIGH PRESSURE	: 70 Mpa
LOW PRESSURE	: 7 Mpa
NO LOAD SPEED	: 1400 RPM
LOW PRESSURE OUTPUT	: 5L / min
TYPE OF OIL	: 15-32 #ANTI-WEAR

HYDRAULIC PEX PIPE CRIMPING TOOL



TH




U



INSULATED HANDLE

PART NO	: DW-1632
PIPE CAPATIBILITY	: PEX, PB, PE, PAP, PIPES AND MULTI LAYER PIPES
JAW TYPES	: TH / U
JAW SIZES	: 16MM, 20MM, 25MM, 26MM, 32MM
MAX CRIMPING FORCE	: 8T

HYDRAULIC KNOCKOUT PUNCH TOOL

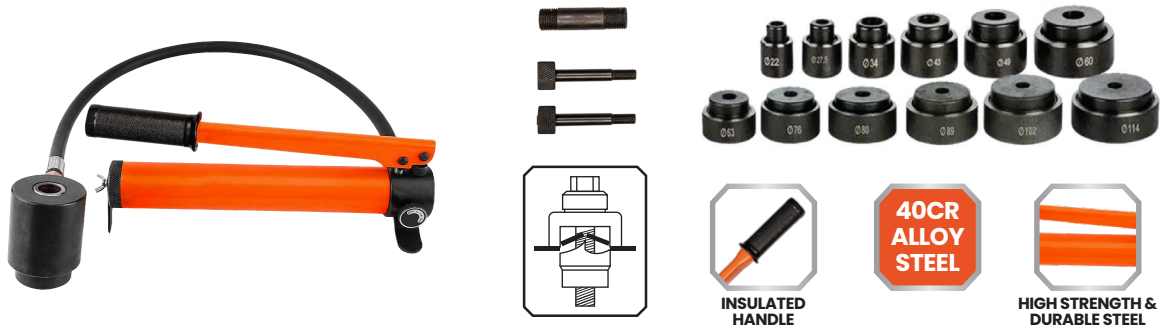

PART NO.	DIE SIZES (Ø)	PRESSURE	STROKE	PUNCH DIE DIA RANGE
DW-8B	22/27.5/34/43/49/60	8T	22 MM	22-60
DW-15B	63/76/80/89/102/114	15T	25 MM	63-114

HYDRAULIC BEARING PULLER



PART NO.	TONNE	SPREAD	REACH	STROKE
DW-5T	5T	50-200 MM	106 MM	50 MM
DW-10T	10T	50-250 MM	97 MM	50 MM

HYDRAULIC PIPE BENDER



PART NO.	TONNAGE CAPACITY	WALL THICKNESS OF PIPE RANGE
DWS-2	12T	3-4.5 MM
DWS-3	16T	3-4.5 MM

STROKE LENGTH	BENDING FORMER SIZES
250 MM	1/2", 3/4", 1", 1-1/4", 1-1/2", 2"
290 MM	1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"

HYDRAULIC CRIMPING TOOL



185 MM



240 MM



300 MM



400 MM



500 MM



630 MM

PART NO.	OUT PUT TONNE	mm ²		AWG	
DW-630	25T	150	630	300 MCM	1250 MCM

BATTERY POWERED HYDRAULIC CRIMPING TOOL



BATTERY POWERED CABLE CUTTING TOOL

